# terragen



	NAME	POSITION	DATE	SIGNATURE
Reviewed by	Adish SEWLALL	QSE Coordinator	11/05/2021	Set all
Approved by	Jean Marc IWEINS	Power Plant Manager	12/05/2024	Varelweins
				Power Plant Manager
				torragen



TGEN-INS-SHE-001 **REVISION 7** 

Issued on 26/09/2013

# **Contents**

1	Pur	Purpose and scope		
2	Do	cument control	4	
3	Inte	egrated Management System Policy - Quality, Safety & Health, Environment	5	
4	gen	neral instructions	6	
5	pre	paration and organisation of work on site	10	
6	she	instructions for specific working environment.	12	
	6.1	Working in an electrical environment	12	
	6.2	Working in Room equipped with Gas Suppression Systems – e.g. Electrical Rooms .	13	
	6.3	Work at height	14	
	6.4	Hot work	15	
	6.5	Work in confined space	16	
	6.6	Lifting machine	17	
	6.7	Loading and unloading from vehicle	18	
	6.8	Excavating and trenching	19	
	6.9	Industrial radiography	19	
	6.10	Chemicals	20	
	6.11	Legionellosis	21	
7	inst	tructions for emergency situations	22	
8	spe	cific instructions for contracting companies	23	



TGEN-INS-SHE-001 **REVISION 7** Issued on 26/09/2013

#### PURPOSE AND SCOPE

Terragen Ltd recognises the importance of safety in a workplace and thus expects that safety, health & environment (SHE) instructions are complied with on its premises. The personnel of Terragen Ltd and contracting companies working for Terragen Ltd are requested to commit themselves to comply with the safety instructions on site. The present document 'General SHE instructions' applies to all activities on the premises of Terragen Ltd.

Moreover, the responsible party of each contracting company should read and understand this document and communicate the instructions to his personnel who work for Terragen Ltd.

In addition to the SHE instructions, everyone (Terragen's personnel and contractors) is expected to abide by the applicable local legislation including Occupational Safety and Health Act 2005 and Environment Protection Act 2002.



TGEN-INS-SHE-001 **REVISION 7** Issued on 26/09/2013

# **DOCUMENT CONTROL**

AMENDMENT RECORD				
Page No.	Date of amendment	Revision history		
8, 10, 19	07/10/2013	Pg 8: 'Open or close circuit breakers' was deleted and inserted on Pg 19 under 'electrical requirement'. Pg 10: '(by Chef de quart)' inserted under Hot work Pg 19: new title inserted 'Electrical requirement'		
4,5	11/11/2014	Terragen's QSE Policy has been replaced and new pictograms added to general instructions		
4	03/05/2016	Terragen's QSE Policy has been updated with the 2016 version		
10	03/05/2016	Work at height regulations 2013 has been added. Occupational Safety and Health (Scaffold) Regulations changed from 2011 to 2013		
11	03/05/2016	TGEN-INS-OPE-020 Hot Work Instructions has been added		
12	03/05/2016	TGEN-INS-SHE-004 Confine Space Operating and Rescue Procedure has been added. Device measuring toxic gases has been added. Portable local exhaust ventilation has been added. Adequate natural and artificial ventilation has been added.		
15	21/12/2016	Radiographic instructions have been reviewed		
20	21/12/2016	Safety and Health (Scaffold) regulations 2011 removed		
4	16/10/2019	Terragen's QSE Policy has been replaced.		
6,7	16/10/2019	Additional instructions concerning use of phones, etc.		
9-18	16/10/2019	Phone number on emergency situations updated.		
11	02/07/2020	Drilling on metal added in hot work definition.		
4	02/07/2020	Terragen's QSE Policy has been updated		
7	20/10/2020	Link to waste management plan added→Rev06		
4	05/05/2021	Terragen's QSE Policy has been updated		
9	05/05/2021	COVID-19 measures have been included		
11	05/05/2021	Working in Room equipped with Gas Suppression Systems - e.g. Electrical Rooms added→Rev07		



TGEN-INS-SHE-001 **REVISION 7** 

Issued on 26/09/2013

3 INTEGRATED MANAGEMENT SYSTEM POLICY - QUALITY, SAFETY & HEALTH, ENVIRONMENT

> January the 21st, 2021 Revision 4

#### TERRAGEN LTD INTEGRATED MANAGEMENT SYSTEM POLICY

We believe that excellence in delivering quality products and services, in dealing with environmental stewardship and occupational health and safety issues are the backbone of our Integrated Management System (IMS). At Terragen, we are committed to continually improve our business processes and the consistent generation of steam and electricity by; meeting the needs and expectations of our customers and relevant interested parties, protecting the environment, rendering safe and healthy workplace and complying with legal obligations as well as other applicable requirements.

Terragen's Integrated Management System strategic objectives are:

# Occupational Health and Safety (OH&S)

- Reinforce our OH&S culture at all levels and for all the worker community by promoting group safety interactions
  - Improve the effectiveness of our fire prevention and protection

#### Quality

- Maintain high plant performances
- Conduct successfully our major works during 2021 annual shutdown
- Ensure effectiveness of cane straw supply chain as per its expected capacity

#### Environment

- Develop sources of other biomass that can be used as fuel with particular emphasis on Eucalyptus
  - Maintain coal ash recycling rate at high level
  - Reduce consumption of water and chemicals treatment costs Reinforce the control and monitoring of our water and air emissions

The Top Management of Terragen Ltd acknowledges that leadership and commitment is core to attain planned objectives and shall allocate all the necessary resources needed for enhancing the performance of the Integrated Management System. Workers shall be engaged, directed and supported in order to align their interests with the mission, vision and strategic direction of the power plant. Occupational health and safety matters shall be tackled with the consultation and participation of workers' representatives.

Members of the Integrated Management System Committee have been assigned the responsibilities and authorities to ensure; the IMS conforms to requirements of ISO 9001:2015, ISO 14001:2015 and ISO 45001: 2018 International Standards, processes are delivering their intended outputs, the IMS performance and the opportunities for improvement is reported to Top Management, the promotion of customer focus and the preservation of the integrity of the IMS.

This policy is applicable to Terragen Ltd operating in Belle Vue Mauricia Mapou, producing electricity and steam.

ver Plant Manager

Page 1 of 1 terrager

Part of terra | For the future. From 1838



TGEN-INS-SHE-001 REVISION 7 Issued on 26/09/2013

#### **GENERAL INSTRUCTIONS**

Wearing of the following personal protective equipment by personnel and contractors on site is mandatory:



Safety Shoes is Mandatory on Site



Hearing protection is mandatory in hearing protection zones.



Please always use Pedestrian Walkways



FFP3 mask is mandatory in designated zones.



Hard hat is mandatory in designated zones



Please use handrails when taking staircase



Eye protection is mandatory in designated zones

Visitors only: They should wear appropriate clothing that covers the body and flat shoes. Hard hats and disposable ear plugs will be provided by Terragen during their visit.

#### Entry to Terragen Ltd premises

Any person visiting or having an appointment at Terragen Ltd must stop and register at the security post on his arrival and give the name of Terragen's contact person with whom he has an appointment. A 'visitor's badge' will be given by the security officer, that he will have to display during his movement on our premises. The security officer will show him the way to his contact person or to the reception in case the contact person is not reachable. The security officer will give visitors a 'General information' leaflet that outlines SHE instructions. The visitors must return the 'visitor's badge' to the security officer on their departure.



TGEN-INS-SHE-001 **REVISION 7** Issued on 26/09/2013

- Vehicles circulation on premises of Terragen Ltd
  - ✓ No vehicle is allowed to park inside the premises of Terragen Ltd excluding its personnel. Contractors and visitors must park their vehicles outside the premises, next to the security office. Other vehicles that are allowed to enter the premises for a short time are:
    - for loading and unloading of materials;
    - Vehicles that are hired by Terragen to perform work on site.

# No Parking is allowed:

- In front of Store except for loading and unloading.
- o In front of Main Building Office [Reception] except for loading and unloading
- o In front of the cooling tower 2 limited to the first two CRF pumps
- ✓ Every vehicle circulating on site must comply with the speed limit displayed on various locations on premises (as shown below). Should there be any non-compliance with the speed limit on site, disciplinary action will be taken.



#### **ALL VEHICLES** E.g.: Passenger car, motorcycles, light trucks, heavy vehicles, ...

- ✓ Wheel loader, forklift and other vehicles must only be driven by persons who have received training and instruction or possess a valid appropriate driving licence.
- ✓ Other permits such as the valid report of examination of a crane/lifting machine may requested for lifting vehicles.
- Smoking is prohibited on the premises of Terragen Ltd except in the designated smoking zone located besides the maintenance building and contractor's mess.
- Drinking of Alcohol and illicit products are prohibited on the premises of Terragen Ltd. Any violations maybe subject to legal prosecution and immediate ban from Terragen Ltd
- It is prohibited to manipulate any equipment at Terragen Ltd unless it has been authorised.



TGEN-INS-SHE-001 **REVISION 7** Issued on 26/09/2013

#### Use of Mobile phones

The use of mobile phones can be a source of distraction and loss of vigilance during activities and interventions. It is strictly recommended to use mobile phones only on emergency situations and for work purpose only. Special attention should be brought during the use of mobile phone such that no danger prevails on you or other workers on site.

The Following Rules apply for use on Mobile Phones at Terragen Ltd:

- Do not talk or text with a mobile phone when moving or walking inside Terragen premises.
- If you have to talk or text with a mobile phone, move out of the way of others and to the side of the pathways. Also, check if there isn't any risk or danger that may be caused by process operations or works in progress nearby you.
- Mobile phone usage when driving a vehicle, work engine, or machinery such as cranes, machine displacement, rotation of parts and moving parts are strictly forbidden.

# **Environmental protection & waste management**

Housekeeping is a good practice. Personnel of Terragen and contractors must always tidy up the area where work has been carried out. Any waste generated must be disposed of in an appropriate way as outlined in the 'Waste management plan TGEN-INS-WMA-001'. No chemicals including oil, paint, or hazardous substance must be discharged in drain or on land. Severe actions will be taken against any person who is carrying out such an act.

No hazardous wastes should be dumped in drains, appropriate retention or disposal method should be used and followed. Contact your work supervisor at Terragen to guide you.

All wastes should be segregated and disposed in designated bins. Plastic wastes, paper wastes, cardboards, electronic wastes, domestic wastes, industrial wastes and hazardous wastes should be disposed according to designated waste disposal methods. (Refer to Waste Management Plan - TGEN-INS-WMA-001')

The Waste Management Plan is available for consultation from hyperlinks on Purchase orders and website of <a href="www.terra.co.mu">www.terra.co.mu</a> >> Power >> Downloads >> Waste Management Plan.



TGEN-INS-SHE-001 **REVISION 7** Issued on 26/09/2013

Housekeeping Rituals are undertaken on every Fridays at 15:30 where all contractors and employees are called to stop works and conduct housekeeping of their workstations.

Housekeeping Rituals are undertaken on Saturday at 15:30 during annual shutdowns.

Date and Time of Housekeeping may vary and shall be communicated accordingly.

Water and Electricity should be used consciously and all wastage should be prevented.

Any type of environmental pollution is strictly forbidden.

- Any floor opening or removal of grating must be notified to the 'Chef de quart' and the 'Chargé des travaux' who will undertake appropriate measures such as placing of barriers and warning sign to prevent persons and materials from falling.
- All sanitary measures for contagious diseases such as COVID-19 shall be respected. Other sanitary measures may be imposed accordingly.



TGEN-INS-SHE-001 **REVISION 7** Issued on 26/09/2013

#### PREPARATION AND ORGANISATION OF WORK ON SITE

The personnel of Terragen Ltd and contracting companies are required to have the necessary work permit and documents before starting any work on site to ensure a safe work environment, prevent accidents and damage to the company's property. They are expected to comply with applicable instructions and procedures at Terragen Ltd.

The flowchart below describes the steps for work preparation until its completion.

Note: No work must be started on site until it has been authorised by the 'Chef de quart' who initiates the permit-to-work procedure and issues a work permit. The 'Chargé de travaux' of Terragen Ltd keeps the pink sheet of the work permit during the duration of the work and ultimately hand it over to the 'Chef de quart' after the work is over. The 'Chef de guart' will then proceed with the removal of the lockout devices and will verify that it is safe to start the equipment.


Before starting to work the 'Chargé de travaux' & 'Chef de quart' of Terragen Ltd must conduct a risk assessment on the work to be carried out and all precautionary measures will be listed in the 'Risk assessment sheet'. The 'Chargé de travaux' of Terragen will provide the above information to the supervisor of the contracting company who will ultimately communicate the same to his team members and ensure that they are implemented.

Refer to the permit-to-work procedure for more information.



TGEN-INS-SHE-001 **REVISION 7** 

Issued on 26/09/2013

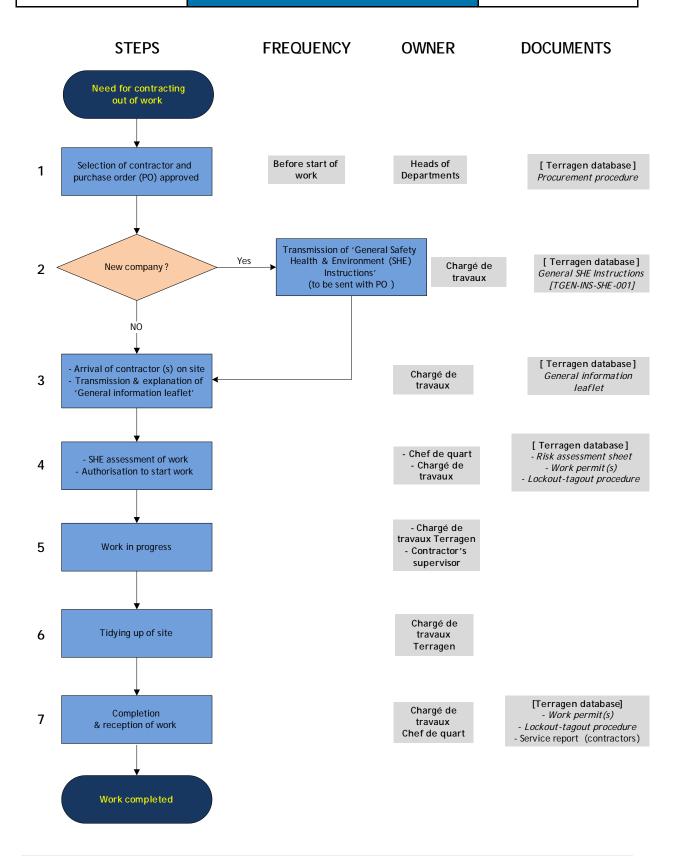



TGEN-INS-SHE-001 **REVISION 7** 

Issued on 26/09/2013

- SHE INSTRUCTIONS FOR SPECIFIC WORKING ENVIRONMENT
- Working in an electrical environment

#### **DEFINITION**

#### **HAZARDS & RISKS**



Condition where an employee is required to work near electrical installation

Hazard: exposed electrical parts, overloaded circuits, damaged insulation, inadequate wiring, damaged tools & equipment, wet conditions.

Risks: Burn, electrification, electrocution

#### **PROHIBITIONS**



Entering low & high voltage electrical distribution rooms without permission

#### REQUIREMENTS

- Chef de guart of Terragen Ltd is responsible for authorising electrical works
- Persons working in an electrical environment must be competent
- Other persons must be under the supervision of a competent person of Terragen Ltd
- All works on electrical installations must be carried out in accordance with the local regulations in force: Occupational Safety and Health (Electricity at Work) Regulations 2009
- Use appropriate protective equipment as and when required
- Use tools that are in conformity with applicable standards
- All electrical equipment must possess an earthing point to be connected to Terragen's earthing system

#### **FIRST AID**



- Protect: Disconnect the power immediately. If you are unable to cut the power supply, use insulating gloves to move away the casualty.
- Inform: Control room 2661248/54227727 or 233 (internal)
- Rescue: Assist the injured person until arrival of a first aider or medical person

#### ADDITIONAL INFORMATION

- Terragen Ltd will supply electricity for works carried out by contractors, 400V 50Hz for 3 phase and 230V 50Hz for single phase.
- The following electrical socket outlets are available: blue 230V, 16A, 3 pins; and red -400V, 63A, 5 pins.
- Terragen Ltd will neither provide the corresponding plugs nor perform any connection or repair on contractors' electrical equipment.
- All electrical outlets at Terragen Ltd are protected by RCDs rated 30mA. In case repeated tripping of the RCDs by faulty equipment & tools belonging to contractors, Terragen will prohibit their further use.



TGEN-INS-SHE-001 **REVISION 7** 

Issued on 26/09/2013

# Working in Room equipped with Gas Suppression Systems - e.g. Electrical Rooms

#### **DEFINITION**

#### **HAZARDS & RISKS**



Condition where an employee is required to work in a room equipped with a gas suppression system

Hazard: oxygen deficiency

Risks: breathing difficulty, asphyxiation,

#### **PROHIBITIONS**



• Entering low & high voltage electrical distribution rooms without permission

#### **REQUIREMENTS**

- Chef de quart of Terragen Ltd is responsible for authorising access to rooms equipped with Gas suppression Systems.
- Persons working in an electrical environment must be competent
- Other persons must be under the supervision of a competent person of Terragen Ltd
- Use appropriate protective equipment as and when required
- When Fire Alarms sound, Room Should be evacuated immediately

# **FIRST AID**



- Protect: Evacuate and Help casualty to evacuate room immediately. Secure affected site.
- Inform: Control room 2661248/54227727 or 233 (internal)
- Rescue: Assist the injured person until arrival of a first aider or medical

#### **ADDITIONAL INFORMATION**

- · Caution should be taken where works involve emanation of dust. This can trigger the gas suppression system
- Other Measures may apply under such conditions



TGEN-INS-SHE-001 REVISION 7

Issued on 26/09/2013

#### 6.3 Work at height

#### **DEFINITION**

#### **HAZARDS & RISKS**



The performance of work, at a place of work above, at or below ground level, from which an employee may fall from a height exceeding 2 metres.

Hazard: Wind, absence of guardrails, falling access, overreaching, objects. slipping, tripping, obstruction, wet conditions.

Risks: Fall, injury

#### **PROHIBITIONS**



Using ladder, stepladder, and stool as a workstation is prohibited. They are considered as work equipment to access provisional height only and not for working at height.

#### **REQUIREMENTS**

- Wearing of hard hat with chin strap is mandatory
- Demarcate the area under which work at height is being done
- Collective protection must be provided as required: guardrails, scaffolding, telescopic boom lift, rolling ladder platform, work in group, prevent unauthorised access
- Respect the Occupational Safety and Health (Work at height) Regulations 2013
- Wear personal protective equipment: harness with fall protection (personnel who will be using the harness must be trained)
- Identify anchor points prior to start of work
- Providing a secure means (foothold, handhold, ...) where any person is liable to fall at a distance of more than 2 metres (OSHA 2005 & Work at height regulations 2013)
- Caterpillar working platform refer to safety practices in manual
- Ladders
  - ✓ use ladder that is in good condition and securely fixed at the base to prevent it from slipping/falling
  - ✓ it extends at least one metre above the place of landing in the absence of adequate handhold
  - ✓ it must be placed in safe areas (not near overhead power lines, door, ...)
- Scaffolding
  - ✓ Every employer who uses a scaffold must ensure to always be in compliance with Occupational Safety and Health (Scaffold) Regulations 2013
  - ✓ Scaffolding must be inspected before each use by a competent person
  - ✓ Employees involved in scaffold works must be provided with adequate and appropriate information, instruction and training.



- Protect: Secure the work place. Put in place any safety measure as required.
- Inform: Control room 2661248/54227727 or 233 (internal)
- Rescue: Assist the injured person until arrival of a first aider or medical person



TGEN-INS-SHE-001 REVISION 7

Issued on 26/09/2013

#### 6.4 Hot work

#### **DEFINITION**

Any activity with potential to generate flame, heat or spark such as welding, burning, brazing, grinding, drilling on metal, soldering or torch flame

#### **HAZARDS & RISKS**

Hazard: open flames, flying sparks, toxic fumes/ gases, slags

Risks: fire, explosion, inhalation of fumes, injury

#### **PROHIBITIONS**



cutting.

- Carrying out an activity without authorisation
- Performing hot work in any equipment or container that have previously contained materials that could develop explosive atmospheres until they have been sufficiently purged and cleaned
- To use Terragen's earthing network as a grounding point during arc welding
- Welding electrode to touch gas cylinders

#### **REQUIREMENTS**

#### For all hot works

- Authorisation by the 'Chef de quart' is mandatory
- Follow Hot Work Instructions of Terragen, TGEN-INS-OPE-020
- Demarcate area where hot work is being carried out (Chargé de travaux/contractor)
- Protect area underneath if hot work is being carried out at height
- The Chef de quart and Chargé de travaux must ensure that the area or equipment is properly prepared for hot work and the operation is conducted safely. The area must be re-inspected by the Chef de quart for any risk of fire after the work is over.
- Ensure an appropriate firefighting equipment is present during the work (Chef de quart & Chargé de travaux)
- Remove any flammable material from that area
- Person(s) carrying out the hot work must wear 100% cotton clothing and suitable PPE: welding helmet, face shield, goggles, leather apron & long-sleeved leather gloves, leather spats

#### For all welding/cutting works

- Welding should be carried out by a competent person
- · For welding/cutting in confined space, ensure adequate ventilation is provided and welding fumes are
- Warn and protect other persons working in the welding area against arcs, fumes, sparks
- Place oxygen and acetylene cylinders vertically and secure them on trolley. Store cylinders away from sources of high temperature.
- Ensure the cylinders are in good condition before every use and check for gas leaks at each connection with a suitable leak detection product
- Fit non-return valves on the torch to prevent back-feeding of gas into the hoses
- Ensure flashback arresters are fitted onto pressure regulators on cylinders
- When returning empty cylinders, close the valves and screw on protecting caps



- Protect: Cut power supply to the equipment/ isolate gas cylinders and remove the casualty away from the area
- Inform: Control room 2661248 / 54227727 or 233 (internal)
- Rescue: Assist the injured person until arrival of a first aider or medical person



TGEN-INS-SHE-001 REVISION 7

Issued on 26/09/2013

#### 6.5 Work in confined space

#### **DEFINITION**

A confined space can be any space of an enclosed

nature where there is a risk of death or serious injury from hazardous substances or dangerous conditions (e.g. lack of oxygen). Some places may become confined



spaces when work is carried out, or during their construction, fabrication or subsequent modification.

#### **HAZARDS & RISKS**

Hazard: oxygen deficiency, enrichment, atmosphere, oxygen flammable excessive heat. atmosphere, flowing liquid, ergonomic hazards

Risks: breathing difficulty, burns, asphyxiation, trip/fall, skin irritation, death, fire/explosion

#### **PROHIBITIONS**



- Enter or remain in a confined space without authorisation (OSHA 2005)
- Work in a confined space if there is presence of flammable or toxic gases.

#### REQUIREMENTS

The following are mandatory for all confined spaces identified by Terragen Ltd:

- Abide by OSHA 2005 regulation Part VI section 70 regarding working in confined spaces in which dangerous fumes are liable to be present.
- Follow applicable Confine Space Operating and Rescue Procedure
- Extract hazardous substances if necessary using Terragen's portable LEV
- Measure the level of oxygen or toxic gases before entering and keep the gas measuring device inside the space during the undertaking
- Always work in team and assign one member (attendant) the responsibility to keep watch outside and to monitor the work
- Where practicable, a person working in a confined space must wear a belt with a rope attached and the free end is held by the attendant (OSHA 2005).
- Provide safe means of access to and egress from the confined space
- Sufficient & suitable lighting for entry & work in a confined space
- Provide adequate natural or artificial (using portable LEV) ventilation during work in a confined space
- Wear suitable PPE as indicated on the risk assessment sheet issued by the 'Chef de quart' & 'Chargé de travaux'
- Maintain clear communication between entrants, attendant and supervisor
- Use of electrical equipment: the power should be supplied from an isolating transformer.



- Protect: The person working in the confined space must immediately come out if he experiences uneasiness. In case of incident, remove the casualty outside from the interior using appropriate means. Do not enter the space if you do not know the cause.
- Inform: Control room **2** 2661248 / 54227727 or 233 (internal)
- Rescue: assist the injured person until arrival of a first aider or medical person



TGEN-INS-SHE-001 REVISION 7

Issued on 26/09/2013

#### 6.6 Lifting machine

#### **DEFINITION**


A lifting machine is any equipment intended for raising & lowering of persons, goods or materials and includes any accessory used in doing so. E.g.: crane, forklift, mobile elevating work platform, winch, pulley block.

#### **HAZARDS & RISKS**

falling/striking objects, Hazard: tripping, slipping

Risks: fall, collision, crushing, injury

#### **PROHIBITIONS**





- Use accessories that have defect Carry people on a crane
- Walk or remain below a suspended load
- Lift a load if you doubt its weight
- Use guardrails, scaffolding or any other equipment as lifting points

#### **REQUIREMENTS**

- Abide by OSHA 2005 regulation Part V section 51 regarding lifting machines and cranes
- Use only a lifting machinery that has been examined by a registered machinery inspector (OSHA 2005 Part V section 51)
- Lift Plan [TGEN-BL-SHE-039] should be completed for all critical lifts [Load > 1 T]
- Other than critical lifts, the Chef de Quart, Work Supervisor or HOD may advise a lift plan for other lifts that they may deem necessary.
- A lifting machine must be operated by a competent person and signals should be given by a competent & authorised person.
- · All anchoring & fixing appliances of lifting machines must be inspected weekly and before use by a competent person and must be recorded in a register
- Demarcate the area where lifting and moving of load is being carried out.
- Ensure the load is properly attached to the lifting equipment to avoid slipping or falling
- Wearing of seat belt when operating the machine



- Protect: Avoid any object/material from falling
- <u>Inform</u>: Control room **2** 2661248 / 54227727 or 233 (internal)
- Rescue: assist the injured person until arrival of a first aider or medical person



TGEN-INS-SHE-001 REVISION 7

Issued on 26/09/2013

#### Loading and unloading from vehicle 6.7

#### **DEFINITION**

Loading & unloading activity includes filling in or removing products, materials, waste, equipment or any other type of object from a vehicle.



#### **HAZARDS & RISKS**

Hazard: manual handling, posture, dust, fumes/gases, leakage/spill, reactivity/ incompatibility, falling/striking objects

Risks: Collision, accidents, explosion, fire, injury, pain

#### **PROHIBITIONS**



- Road congestion when unloading
- Smoking on site
- Vehicle driver & helpers to leave the loading/unloading area & wander in the premises of Terragen Ltd.
- Cleaning of vehicles after work on site

#### **REQUIREMENTS**

- All vehicles and people must follow the rules regarding parking & speed limits at Terragen Ltd.
- The vehicle must stop at the main gate and must be guided to the point of delivery to avoid any unwanted entries and deliveries.
- For any loading/unloading activity, Terragen's personnel must accompany the external party (except for coal, fly ash, bottom ash).
- Wearing of appropriate PPE as needed for the work being carried out.
- Truck driver must be accompanied by an attendant (Road traffic (employment of attendants) regulations 1963).
- Coal, fly ash, bottom ash
  - ✓ During unloading of coal, the door of the skip must first be opened, secured & then toggled
  - ✓ The skips of trucks carrying fly ash, bottom ash & coal must be covered.
  - ✓ Vehicles transporting coal, fly ash & bottom ash from Terragen Ltd must not exceed its maximum gross weight as per Road Traffic Act Government Notice No.53 of 2010
- Chemicals
  - ✓ Refer to SHE instructions for delivery of chemicals
  - ✓ Terragen's chemist/ an authorised person must be present during delivery
  - ✓ Demarcate the area if required
- Diesel
  - ✓ Refer to SHE instructions for delivery of diesel



- Protect: the casualty from material/chemicals exposure
- Inform: Control room 2661248 / 54227727 or 233 (internal)
- Rescue: assist the injured person until arrival of a first aider or medical person



TGEN-INS-SHE-001 REVISION 7

Issued on 26/09/2013

#### 6.8 Excavating and trenching

#### **DEFINITION**

Removal of earth from the

E.g.: man-made cut, cavity, trench



#### **HAZARDS & RISKS**

**Hazard**: falls, falling loads, hazardous atmospheres, trench collapse, cave-in

Risks: Collision, accidents, injury, burial, electrical shock

#### **PROHIBITIONS**

earth's surface.



Excavation or trenching without authorisation from the Chef de quart and 'Chargé de travaux' of Terragen Ltd

#### **REQUIREMENTS**

- Check for underground pipes and cables with the concerned departments
- · Demarcate the area
- Walkways/bridges (width 1 meter) with guardrails must be provided when employees or equipment are required to cross over excavations.
- Placing a shield between the side of the excavation and the work area to prevent cave-in
- Pits must be covered appropriately
- The excavation/ trenching area must be visible at night through proper lighting

#### **FIRST AID**



- Protect: prevent any circulation (vehicles) around area
- Inform: Control room 2661248 / 54227727 or 233 (internal)
- Rescue: assist the injured person until arrival of a first aider or medical person

#### 6.9 Industrial radiography

Radiographic inspection is carried out to verify leakages of pipes. This is generally done outside normal working hours during the annual shutdowns. A notice is communicated to inform all persons present on-site of the radiographic undertaking. No person are allowed to work (except FSO, CdQ, CdB and A.E who will stay at safe distance from the point source) during the radiographic operation.



TGEN-INS-SHE-001 REVISION 7

Issued on 26/09/2013

#### 6.10 Chemicals

#### **DEFINITION**

Chemicals are used in almost all work activities. There are risks associated with the manufacture, transport, use and disposal of chemicals on human and the environment.

#### **HAZARDS & RISKS**

Hazard: Dust, fumes, gases, vapours, reactivity/incompatibility

Risks: Fire, explosion, severe injuries or permanent illness, pollution

#### **PROHIBITIONS**



- Use CMR chemicals (Carcinogenic, mutagenic and reprotoxic chemicals chemicals having the following risk phrases: R40, R45, R46, R49, R60, R61, R62, R63, R68)
- Transfer a chemical to a container without any labeling
- Give chemical containers to unauthorised parties

#### **REQUIREMENTS**

- MSDS of the chemicals must be available for consultation
- Any work being carried out in the water treatment plant area requires authorisation by Chef de quart and Chemist.
- Identifying the precautions to take with the 'Chargé de travaux' when using chemicals (refer to MSDS of chemical)
- Use appropriate PPE: gloves, goggles, overall, dust/fumes mask
- Follow the contingency plan for any spill or leakage of chemical
- Watch out for compatibility of products for storage and transportation



- Protect: The casualty from material/chemicals exposure
- Inform: Control room 2661248 / 54227727 or 233 (internal)
- Rescue: Assist the injured person until arrival of a first aider or medical person



TGEN-INS-SHE-001 **REVISION 7** 

Issued on 26/09/2013

#### 6.11 Legionellosis

#### **DEFINITION**

#### **HAZARDS & RISKS**

Legionellosis is the collective name given to the pneumonia-like illness caused by legionella bacteria which is present in natural water sources and manmade system such as cooling towers & evaporative condensers. People can be infected by inhaling small water droplets/aerosol, suspended in air, containing the bacteria. A temperature of 20-40°C favours the growth of the bacteria.

Hazard: Legionella

Risks: Pontiac fever, legionnaire disease (potentially fatal form of pneumonia)

#### **PROHIBITIONS**



Wander around the cooling tower (within the demarcated area)

#### REQUIREMENTS

- Wear a FFP3 mask when working in the demarcated area around cooling tower
- When cleaning the tower using a high pressure cleaner, wear FFP3 mask



- Observe: for any symptom (high fever, dry couch, muscles pains, head ache, pneumonia). Normally the incubation period is 2-10 days.
- Inform: The employer/Head of department & visit a doctor



TGEN-INS-SHE-001 **REVISION 7** 

Issued on 26/09/2013



#### INSTRUCTIONS FOR EMERGENCY SITUATIONS

The instructions defined below will be followed in case of incident/accident, fire and dangerous environmental pollution. The supervisor of the contracting company is responsible to communicate the instructions to his team before starting any work on site.

INSTRUCTIONS FOR EMERGENCY SITUATIONS			
Accident	<ul> <li>Duties of first person witnessing the event:</li> <li>1) Protect the injured person by taking appropriate measures;</li> <li>2) Inform: Control room <b>2</b> 2661248/54227727 or 233 (internal)</li> <li>3) Specify: place, source, severity of accident &amp; persons involved;</li> <li>4) Assist the injured person until the arrival of a first aider or medical person.</li> </ul>		
Fire	<ul> <li>Duties of first person witnessing the event:</li> <li>1) If there is onset of fire, put out fire using appropriate means without taking any personal risk;</li> <li>2) Inform: Control room 2661248/54227727 or 233 (internal) Specify: place, source, severity of incident &amp; persons trapped.</li> </ul>		
Spillage of chemicals	Duties of first person witnessing the event:  1) Contain the spill/leakage using spill kit available (for small spills only). Refer to contingency plan for spillage;		



TGEN-INS-SHE-001 **REVISION 7** Issued on 26/09/2013

	<ol> <li>Inform: Control room 22661248/54227727 or 233 (internal)</li> <li>Specify: place, source, severity of incident &amp; persons involved;</li> <li>Call the Chemist and QSE department.</li> </ol>
Cyclone or flood	<ul><li>All persons on premises of Terragen Ltd must:</li><li>1) Follow the instructions of Power Plant Director &amp; Heads of departments</li><li>2) The supervisor of the contracting company must be in close communication with the 'Chargé de travaux' of Terragen.</li></ul>

#### **EVACUATION**

- 1) Chef de bloc gives information about the fire and announces evacuation
- 2) Fire alarm is activated
- 3) Everyone on the premises of Terragen Ltd must immediately leave his place of work and gather at the assembly point

During evacuation, please ensure the following:

- ✓ Keep calm
- ✓ Close windows and door when leaving your place of work
- ✓ Walk towards the assembly point. Avoid running.
- ✓ Do not use lift
- ✓ Do not obstruct passageways & exits

#### SPECIFIC INSTRUCTIONS FOR CONTRACTING COMPANIES

#### Entry to Terragen Ltd premises

Employees of the contracting companies must stop at the security post on their arrival and give their name, company's name, purpose of their visit and the name of Terragen's contact person whom they have an appointment. A 'visitor's badge' will be given to them by the security officer, that they will have to display during their movement on our premises. The security officer will show him the way to their contact person or to the reception in case the contact person is not reachable. On their first visit, the 'chargés de travaux' of Terragen Ltd will give them a 'General information' leaflet that outlines the safety instructions.

The employees of contracting companies must return the 'visitor's badge' to the security officer on their departure.

# Personal protective equipment (PPE)

The contracting companies must provide their employees with appropriate PPE as the management will not authorise any work on the premises without the required PPE. Terragen Ltd will not provide any PPE except disposal mask FFP2, FFP3.



TGEN-INS-SHE-001 **REVISION 7** Issued on 26/09/2013

Terragen Ltd will send back all those persons who are not wearing all the PPE required for the work.

# **Emergency stop**

An emergency stop (button or cable) is used only for preventing injury to personnel or material loss.

# Compressed air

Terragen Ltd will not provide compressed air to contractors. In case the use of compressed air is authorised, the connection must be done with certified hoses and fittings that are in good conditions and appropriate for use. Valves, whip checks or stop devices must be present on the equipment.

# Compliance with legal & other requirements

The contracting companies are expected to comply with applicable local legal requirements including Occupational Safety and Health Act 2005 and Environment Protection Act 2008, in addition to the present 'General SHE instructions' document and instructions given by the 'Chargé de travaux' of Terragen Ltd and notices present on site.

The supervisor of the contracting company is responsible for enforcing compliance with instructions to prevent the occurrence of accident or material/equipment damage or injury to persons present on site including Terragen's personnel and other contracting companies. The supervisor must nominate assistant/representative who will be responsible for the work on site in the absence of the former.

Refer to OSHA 2005 Part II section 13 regarding 'Persons working in host employers' or self-employed persons' undertaking'.

Compliance with the present document does not relieve the contracting company from liability in case of any incident, as determined by a court of law.

#### Electrical requirement



TGEN-INS-SHE-001 REVISION 7 Issued on 26/09/2013

The following electrical socket outlets are available: blue - 230V, 16A, 3 pins; and red - 400V, 63A, 5 pins. Terragen Ltd will neither provide the corresponding plugs nor perform any connection or repair on contractors' electrical equipment.

It is worth noting that all electrical outlets at Terragen Ltd are protected by RCDs rated 30mA. In case repeated tripping of the RCDs by faulty equipment & tools belonging to contractors, Terragen will prohibit their further use.

Employees of contracting companies are prohibited to open or close circuit breakers & isolating switches of Terragen Ltd.

#### Breaches of works and SHE instructions

Regular audits will be conducted on site to assess the good functioning of the work as well as compliance with procedures and instructions.

Serious breaches of the works and SHE instructions entitle the Management team of Terragen Ltd to forbid the continued presence of the contracting persons on its premises. Terragen Ltd has the right to terminate the underlying agreement in serious cases.